


ThermoWood performance in ground contact

- **ThermoWood performance after 24 months in soil contact is found to be much better than control material**
- **ThermoWood performance after 24 months in soil contact is found to be equal or better than AB and CCA treated material**
- **ThermoWood has no side effects on the environment in terms of leaching of chemical**
- **Results prove that ThermoWood can be used in ground contact**

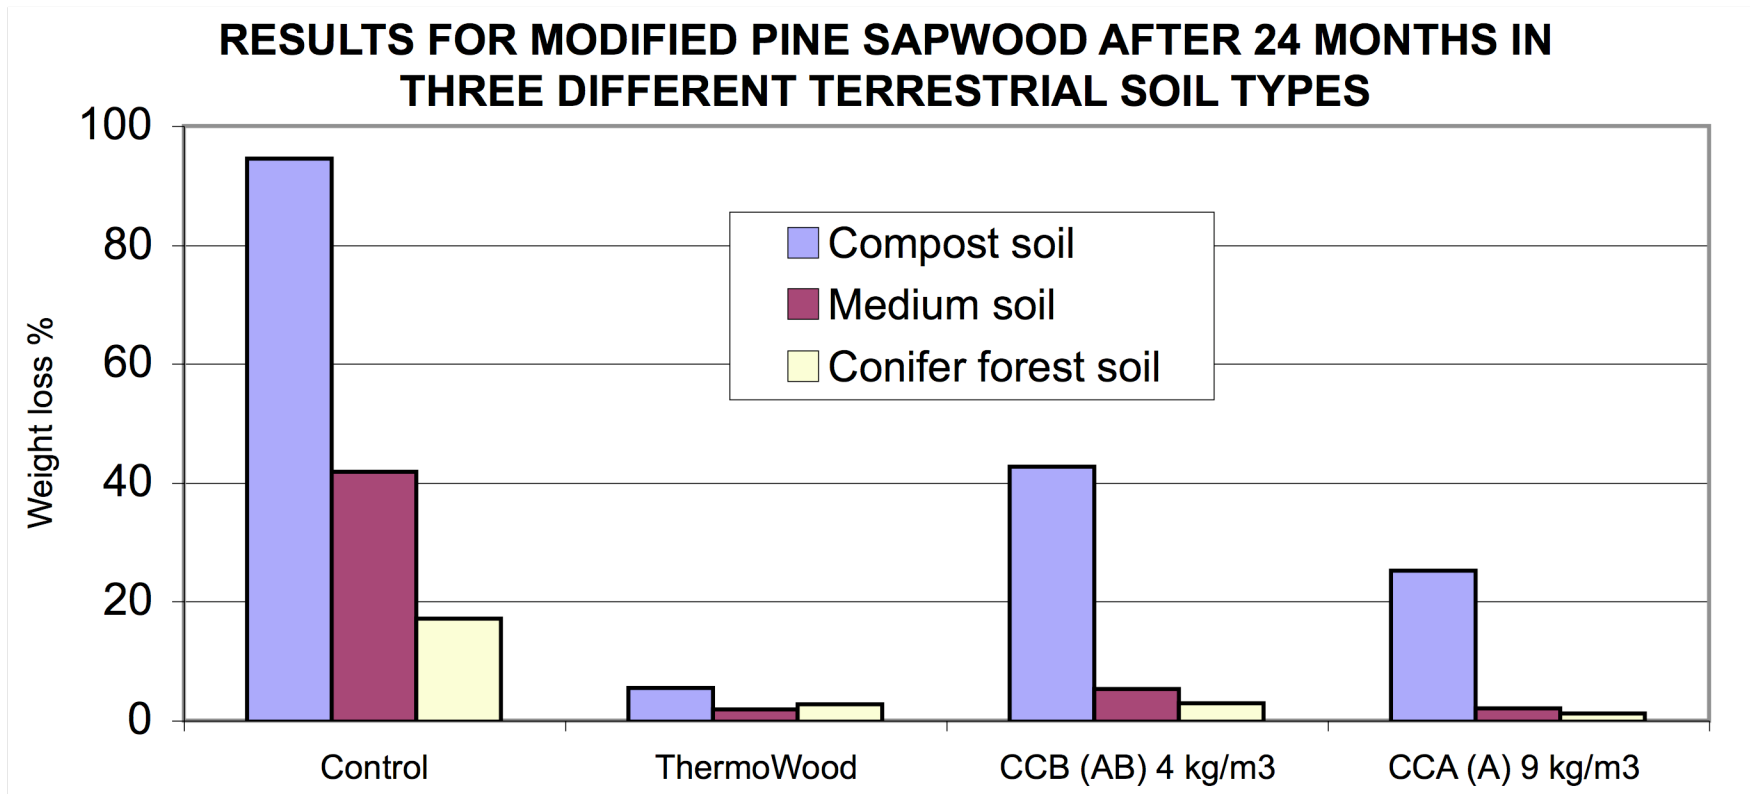

Source:

**Comparison of properties of wood modified by different methods
- Durability, physical and mechanical properties -**

H. Epmeier, Chalmers University of Technology, Sweden

M. Westin, Swedish Institute for Wood Technology Research (Träteknik), Sweden

A.O. Rapp, Bundesforschungsanstalt für Holzwirtschaft (BFH), Germany

T. Nilsson, Swedish University of Agricultural Sciences, Sweden